

## XFP-10DWxx-H0C

10Gb/s 100km DWDM XFP Transceiver  
Hot Pluggable, Duplex LC, 100GHz, DWDM EML&APD, Single mode

### Features

- Support multi protocol from 9.95Gb/s to 11.3Gb/s
- Hot pluggable 30 pin connector
- Compliant with XFP MSA
- Transmission distance of 100km over single mode fiber
- DWDM EML laser transmitter
- APD Receiver
- 100GHz ITU Grid, C Band
- Duplex LC connector
- 2-wire interface for management and diagnostic monitor
- XFI electrical interface with AC coupling
- Power supply voltages : +3.3V, +5V
- Temperature range 0°C to 70°C
- Power dissipation: <3.5W
- RoHS Compliant Part



### Applications

- 10GBASE-EZR/EZW Ethernet
- SONET OC-192 /SDH
- 100km 10G FC
- DWDM Networks

### Description

XFP-10DWxx-H0C Small Form Factor 10Gb/s (XFP) transceivers are compliant with the current XFP Multi-Source Agreement (MSA) Specification. The high performance cooled DWDM EML transmitter

and high sensitivity APD receiver provide superior performance for SONET/SDH, 10G FC and Ethernet applications up to 100km optical links.

## Absolute Maximum Ratings

**Table 1- Absolute Maximum Ratings**

Parameter	Symbol	Min	Max	Unit
Storage Temperature	TST	-40	+85	°C
Case Operating Temperature	TIP	0	+70	°C
Supply Voltage 1	VCC3	-0.5	+4.0	V
Supply Voltage 2	VCC5	-0.5	+6.0	V

## Electrical Characteristics (TOP = 0 to 70 °C)

**Table 2- Electrical Characteristics**

Parameter	Symbol	Min	Typ	Max	Unit	Note	
Supply Voltage 1	Vcc5	4.75		5.25	V		
Supply Voltage 2	Vcc3	3.13		3.45	V		
Supply Current – Vcc5 supply	Icc5			250	mA		
Supply Current – Vcc3 supply	Icc3			500	mA		
Module total power	P			3.5	W		
Transmitter							
Input differential impedance	Rin		100		Ω	1	
Differential data input swing	Vin,pp	150		820	mV		
Transmit Disable Voltage	VD	2.0		Vcc	V		
Transmit Enable Voltage	VEN	GND		GND+ 0.8	V		
Transmit Disable Assert Time	T_off			100	ms		
Tx Enable Assert Time	T_on			100	ms		
Receiver							
Differential data output swing	Vout,pp	300	500	850	mV		
Data output rise time	tr			35	ps	2	
Data output fall time	tf			35	ps	2	
LOS Fault	VLOS fault	Vcc – 0.5		VccHOST	V	3	
LOS Normal	VLOS norm	GND		GND+0.5	V	3	
Power Supply Rejection	PSR	See Note 4 below					4

Notes

1. After internal AC coupling.

2. 20 – 80 %

3. Loss of Signal is open collector to be pulled up with a 4.7k – 10kohm resistor to 3.15 – 3.6V. Logic 0 indicates normal operation; logic 1 indicates no signal detected.

4. Per Section 2.7.1. in the XFP MSA Specification.

### Optical Parameters(TOP = 0 to 70°C)

**Table 3- Optical Parameters**


Parameter	Symbol	Min	Typ	Max	Unit	Ref.
<b>Transmitter</b>						
Operating Data Rate	BR	9.95		11.3	Gb/s	
Bit Error Rate	BER			10-12		
Maximum Launch Power	P <sub>MAX</sub>	0		+5	dBm	1
Optical Wavelength-End Of Life	$\lambda$	X-100	X	X+100	pm	
Optical Wavelength-Beginning Of Life	$\lambda$	X-25	X	X+25	pm	
Optical Extinction Ratio	ER	8.2			dB	
Spectral Width@-20dB	$\Delta\lambda$			1	nm	
Sidemode Supression ratio	SSR <sub>min</sub>	30			dB	
Rise/Fall Time (20%~80%)	Tr/Tf			35	ps	
Average Launch power of OFF Transmitter	P <sub>OFF</sub>			-30	dBm	
Tx Jitter	T <sub>xj</sub>	Compliant with each standard requirements				
Optical Eye Mask		IEEE802.3ae				2
<b>Receiver</b>						
Operating Data Rate	BR	9.95		11.3	Gb/s	
Receiver Sensitivity	Sen			-24	dBm	2
Maximum Input Power	P <sub>MAX</sub>	-7			dBm	2
Optical Center Wavelength	$\lambda_C$	1260		1600	nm	
Receiver Reflectance	R <sub>rx</sub>			-27	dB	
LOS De-Assert	LOSD			-25	dBm	
LOS Assert	LOSA	-35			dBm	
LOS Hysteresis	LOSH	0.5		5	dB	

**Notes:**


1. The optical power is launched into SMF.
2. Measured with a PRBS 231-1 test pattern @10.3125Gbps BER<10-12.

## Pin Assignment

Diagram of Host Board Connector Block Pin Numbers and Name

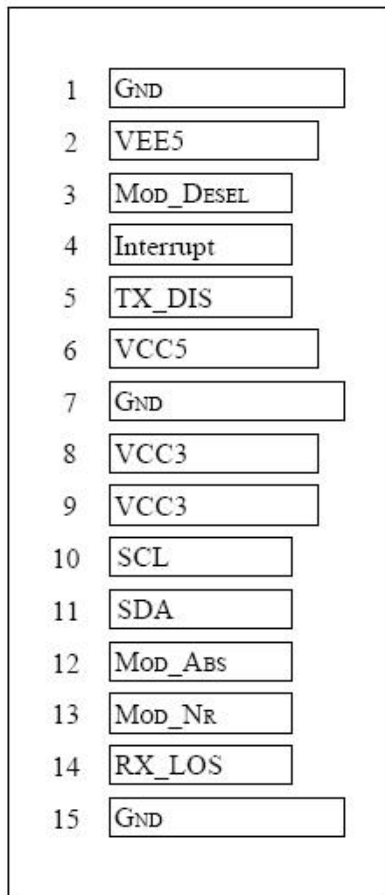

Bottom of Board  
(As view through top of board)

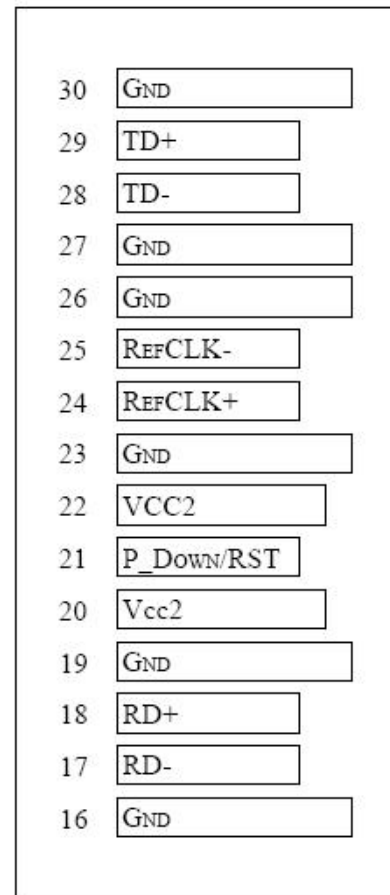

Top of Board

## Pin Description

Table 4- Pin Description

Pin	Logic	Symbol	Name/Description	Ref.
1		GND	Module Ground	1
2		VEE5	Optional -5.2V Power Supply – Not required	
3	LVTTTL-I	Mod-Desel	Module De-select; When held low allows the module to respond to 2-wire serial interface commands	
4	LVTTTL-O	Interrupt	Interrupt (bar); Indicates presence of an important condition which can be read over the serial 2-wire interface	2
5	LVTTTL-I	TX_DIS	Transmitter Disable; Transmitter laser source turned off	
6		VCC5	+5V Power Supply	

7		GND	Module Ground	1
8		VCC3	+3.3V Power Supply	
9		VCC3	+3.3V Power Supply	
10	LVTTTL-I	SCL	Serial 2-wire interface clock	2
11	LVTTTL- I/O	SDA	Serial 2-wire interface data line	2
12	LVTTTL-O	Mod_Abs	Module Absent; Indicates module is not present. Grounded in the module.	2
13	LVTTTL-O	Mod_NR	Module Not Ready;	2
14	LVTTTL-O	RX_LOS	Receiver Loss of Signal indicator	2
15		GND	Module Ground	1
16		GND	Module Ground	1
17	CML-O	RD-	Receiver inverted data output	
18	CML-O	RD+	Receiver non-inverted data output	
19		GND	Module Ground	1
20		VCC2	+1.8V Power Supply – Not required	
21	LVTTTL-I	P_Down/RST	Power Down; When high, places the module in the low power stand-by mode and on the falling edge of P_Down initiates a module reset	
			Reset; The falling edge initiates a complete reset of the module including the 2-wire serial interface, equivalent to a power cycle.	
22		VCC2	+1.8V Power Supply – Not required	
23		GND	Module Ground	1
24	PECL-I	RefCLK+	Reference Clock non-inverted input, AC coupled on the host board – Not required	3
25	PECL-I	RefCLK-	Reference Clock inverted input, AC coupled on the host board – Not required	3
26		GND	Module Ground	1
27		GND	Module Ground	1
28	CML-I	TD-	Transmitter inverted data input	
29	CML-I	TD+	Transmitter non-inverted data input	
30		GND	Module Ground	1

**Note**

1. Module circuit ground is isolated from module chassis ground within the module.
2. Open collector; should be pulled up with 4.7k – 10k ohms on host board to a voltage between 3.15V and 3.45V.
3. A Reference Clock input is not required.

## Digital Diagnostic Functions

As defined by the XFP MSA 1, AscentOptics XFP transceivers provide digital diagnostic functions via a 2-wire serial interface, which allows real-time access to the following operating parameters:

Transceiver temperature

Laser bias current

Transmitted optical power


Received optical power

Transceiver supply voltage


It also provides a sophisticated system of alarm and warning flags, which may be used to alert end-users when particular operating parameters are outside of a factory-set normal range.

The operating and diagnostics information is monitored and reported by a Digital Diagnostics Transceiver Controller (DDTC) inside the transceiver, which is accessed through the 2-wire serial interface. When the serial protocol is activated, the serial clock signal (SCL pin) is generated by the host. The positive edge clocks data into the XFP transceiver into those segments of its memory map that are not write-protected. The negative edge clocks data from the XFP transceiver. The serial data signal (SDA pin) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially. The 2-wire serial interface provides sequential or random access to the 8 bit parameters, addressed from 000h to the maximum address of the memory.


For more detailed information including memory map definitions, please see the XFP MSA Specification.

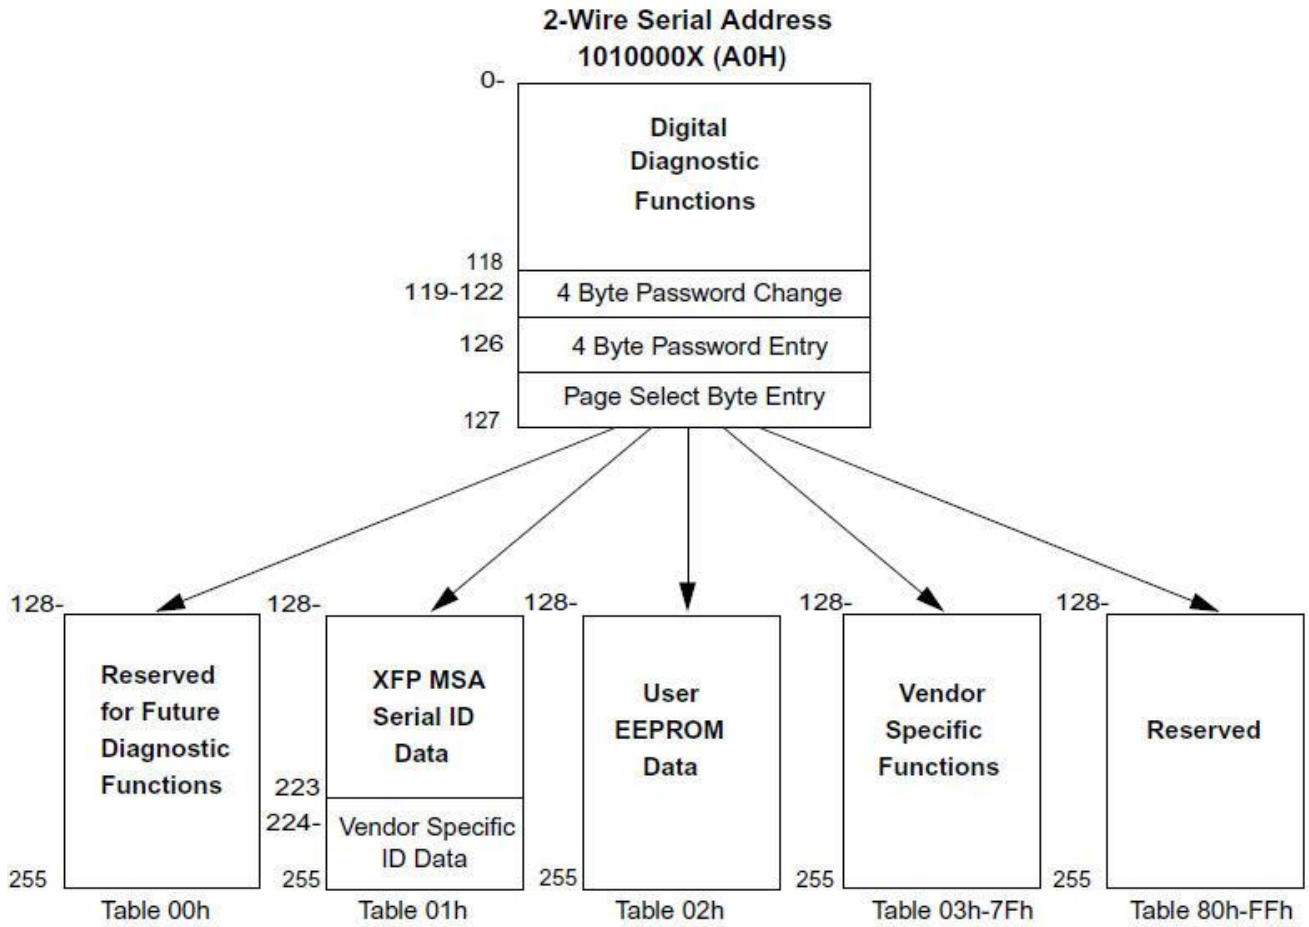

## Recommended Circuit

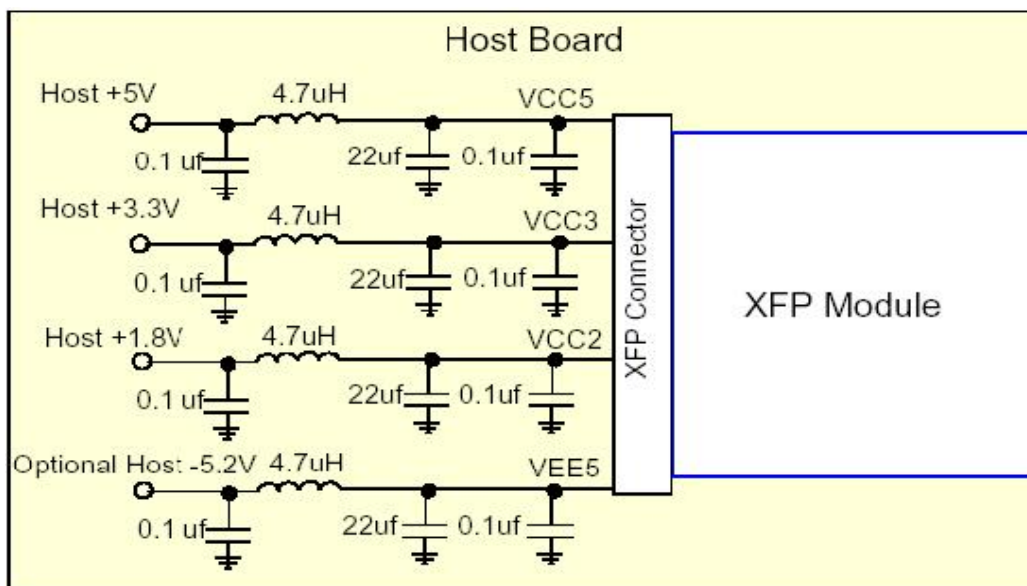


**Recommended Host Board Power Supply Circuit**

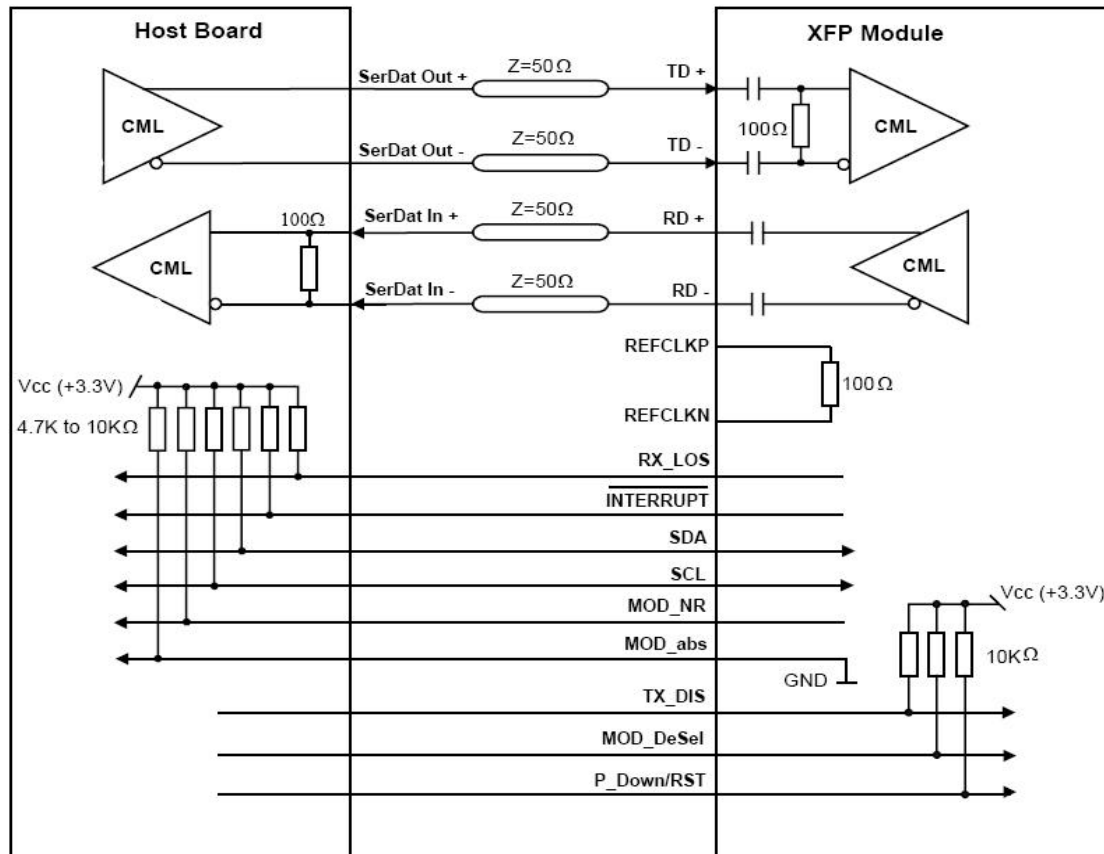

Recommended High-speed Interface Circuit

## Mechanical Dimensions

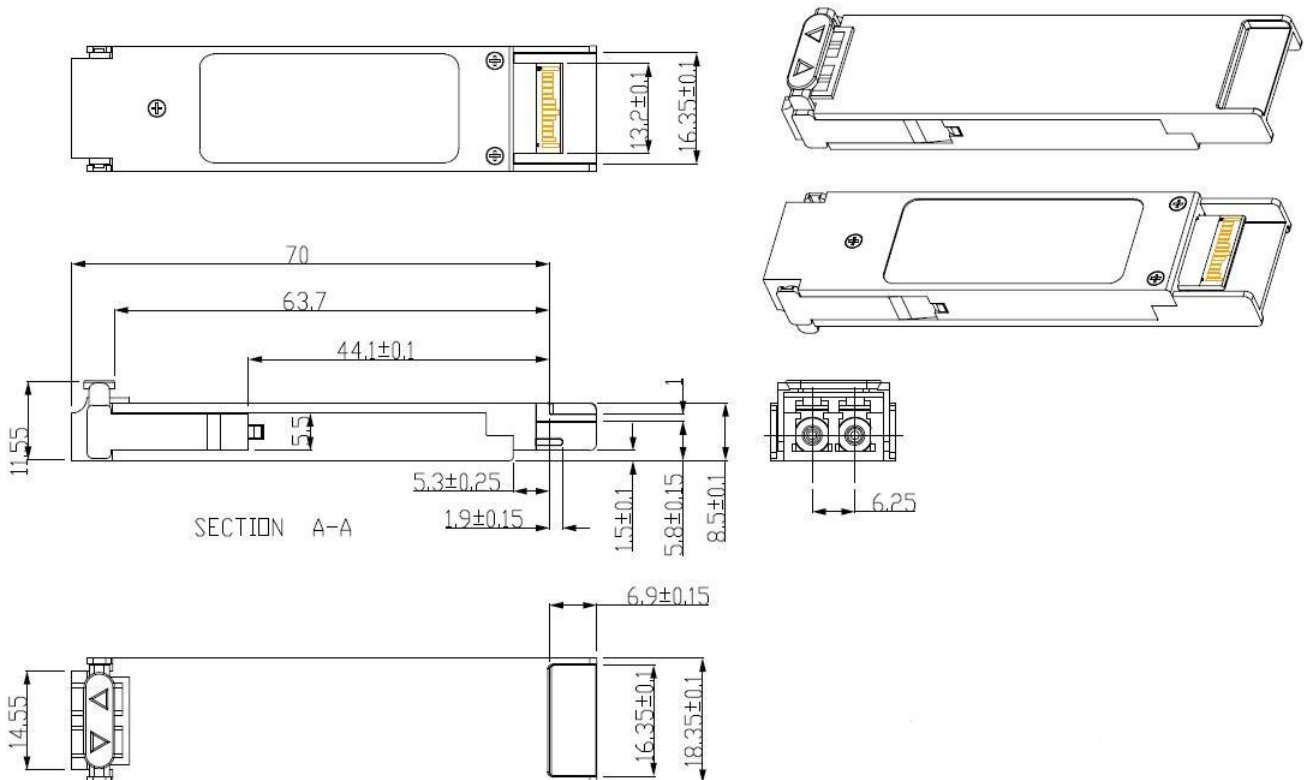



## Order Information

**Table 5- Order Information**

Part No.	Central Wavelength(nm)	Frequency (THZ)
XFP-10DW61-H0C	1528.77	196.1
XFP-10DW60-H0C	1529.55	196.0
XFP-10DW59-H0C	1530.33	195.9
XFP-10DW58-H0C	1531.12	195.8
XFP-10DW57-H0C	1531.90	195.7
XFP-10DW56-H0C	1532.68	195.6
XFP-10DW55-H0C	1533.47	195.5
XFP-10DW54-H0C	1534.25	195.4
XFP-10DW53-H0C	1535.04	195.3
XFP-10DW52-H0C	1535.82	195.2
XFP-10DW51-H0C	1536.61	195.1
XFP-10DW50-H0C	1537.40	195.0
XFP-10DW49-H0C	1538.19	194.9
XFP-10DW48-H0C	1538.98	194.8
XFP-10DW47-H0C	1539.77	194.7
XFP-10DW46-H0C	1540.56	194.6
XFP-10DW45-H0C	1541.35	194.5
XFP-10DW44-H0C	1542.14	194.4
XFP-10DW43-H0C	1542.94	194.3
XFP-10DW42-H0C	1543.73	194.2
XFP-10DW41-H0C	1544.53	194.1
XFP-10DW40-H0C	1545.32	194.0
XFP-10DW39-H0C	1546.12	193.9
XFP-10DW38-H0C	1546.92	193.8
XFP-10DW37-H0C	1547.72	193.7
XFP-10DW36-H0C	1548.51	193.6
XFP-10DW35-H0C	1549.32	193.5
XFP-10DW34-H0C	1550.12	193.4
XFP-10DW33-H0C	1550.92	193.3
XFP-10DW32-H0C	1551.72	193.2
XFP-10DW31-H0C	1552.52	193.1
XFP-10DW30-H0C	1553.33	193.0

XFP-10DW29-H0C	1554.13	192.9
XFP-10DW28-H0C	1554.94	192.8
XFP-10DW27-H0C	1555.75	192.7
XFP-10DW26-H0C	1556.55	192.6
XFP-10DW25-H0C	1557.36	192.5
XFP-10DW24-H0C	1558.17	192.4
XFP-10DW23-H0C	1558.98	192.3
XFP-10DW22-H0C	1559.79	192.2
XFP-10DW21-H0C	1560.61	192.1
XFP-10DW20-H0C	1561.42	192.0
XFP-10DW19-H0C	1562.23	191.9
XFP-10DW18-H0C	1563.05	191.8
XFP-10DW17-H0C	1563.86	191.7

AscentOptics reserves the right to make changes to the product(s) or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information. Edition: Apr. 2019 Published by Ascent Optics Co.,Ltd. Copyright © Ascent Optics All Rights Reserved.

E-mail: [sales@ascentoptics.com](mailto:sales@ascentoptics.com)

Web : <http://www.ascentoptics.com>