

SFP-25BL23-40C

25Gb/s SFP28 BIDI 40km Optical Transceiver Module

Features

- Up to 25.78Gb/s data rate
- 1270nm DFB laser and APD receiver for SFP-25BL23-40Cx
- 2-wire interface with integrated Digital Diagnostic monitoring
- Up to 40km transmission on SMF
- BIDI LC optical connector
- Single +3.3V power supply
- RoHS-6 compliant and lead-free
- Compliant with SFF+MSA and SFF-8472
- Maximum power consumption 1.5W
- Metal enclosure, for lower EMI
- Meet ESD requirements, resist 8KV direct contact voltage
- Operating case temperature
 - Commercial: 0 ~ +70oC
 - Extended: -10 ~ +80oC
 - Industrial: -40 ~ +85oC



Applications

- High-speed storage area networks
- Computer cluster cross-connect
- Custom high-speed data pipes
- Inter Rack Connection

General Description

AscentOptics' SFP-25BL23-40C SFP28 transceiver is designed for use in 25-Gigabit Ethernet links up to 40km over single mode fiber. The module consists of CWDM DFB Laser, APD and Preamplifier in a high-integrated optical sub-assembly. Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472.

The transmitter converts 25Gbit/s serial PECL or CML electrical data into serial optical data compliant with the 25GBASE-LR standard. An open collector compatible Transmit Disable (Tx_Dis) is provided. Logic "1" or no connection on this pin will disable the laser from transmitting. Logic "0" on this pin provides normal operation. The transmitter has an internal automatic power control loop (APC) to

ensure constant optical power output across supply voltage and temperature variations. An open collector compatible Transmit Fault (Tx_Fault) is provided. TX_Fault is module output contact that when high, indicates that the module transmitter has detected a fault condition related to laser operation or safety. The TX_Fault output contact is an open drain/collector and shall be pulled up to the Vcc_Host in the host with a resistor in the range 4.7-10 kΩ. TX_Disable is a module input contact. When TX_Disable is asserted high or left open, the SFP28 module transmitter output shall be turned off. This contact shall be pulled up to VccT with a 4.7 kΩ to 10 kΩ resistor

The receiver converts 25Gbit/s serial optical data into serial PECL/CML electrical data. An open collector compatible Loss of Signal is provided. Rx_LOS when high indicates an optical signal level below that specified in the relevant standard. The Rx_LOS contact is an open drain/collector output and shall be pulled up to Vcc_Host in the host with a resistor in the range 4.7-10 kΩ, or with an active termination. Power supply filtering is recommended for both the transmitter and receiver. The Rx_LOS signal is intended as a preliminary indication to the system in which the SFP28 is installed that the received signal strength is below the specified range. Such an indication typically points to non-installed cables, broken cables, or a disabled, failing or a powered off transmitter at the far end of the cable.

Absolute Maximum Ratings

Table 1- Absolute Maximum Ratings

It has to be noted that the operation in excess of any individual absolute maximum ratings might cause permanent damage to this module.

| Parameter | Symbol | Min | Max | Unit | Notes |
|--------------------------------------|--------|------|-----|------|-------|
| Storage Temperature | TS | -40 | 85 | oC | |
| Power Supply Voltage | VCC | -0.5 | 3.6 | V | |
| Relative Humidity (non-condensation) | RH | 5 | 95 | % | |
| Damage Threshold | THd | -3 | | dBm | |

Recommended Operating Conditions and Power Supply Requirements

Table 2- Recommended Operating Conditions and Power Supply Requirements

| Parameter | Symbol | Min | Typical | Max | Unit | Notes |
|----------------------------|--------|-------|---------|-------|------|------------|
| Operating Case Temperature | TOP | 0 | | 70 | oC | commercial |
| | | -10 | | 80 | | Extended |
| | | -40 | | 85 | | Industrial |
| Power Supply Voltage | VCC | 3.135 | 3.3 | 3.465 | V | |
| Data Rate | | | 25.78 | | Gb/s | |
| Control Input Voltage High | | 2 | | Vcc | V | |
| Control Input Voltage Low | | 0 | | 0.8 | V | |
| Link Distance (SMF) | D | | | 40 | km | 9/125um |

Electrical Characteristics

Table 3- Electrical Characteristics

The following electrical characteristics are defined over the Recommended Operating Environment unless otherwise specified.

| Parameter | Symbol | Min. | Typ. | Max | Unit | Notes |
|--------------------------------------|---------------------|----------------------|------|----------------------|------|-------|
| Power Consumption | p | | | 1.75 | W | |
| Supply Current | Icc | | | 520 | mA | |
| Transmitter | | | | | | |
| Single-ended Input Voltage Tolerance | Vcc | -0.3 | | 4.0 | V | |
| Common mode voltage tolerance | | 15 | | | mV | |
| Differential Input Voltage Swing | V _{in,pp} | 180 | | 700 | mVpp | |
| Differential Input Impedance | Z _{in} | 90 | 100 | 110 | Ohm | 1 |
| Transmit Disable Assert Time | | | | 10 | us | |
| Transmit Disable Voltage | V _{dis} | V _{cc} -1.3 | | V _{cc} | V | |
| Transmit Enable Voltage | V _{en} | V _{ee} | | V _{ee} +0.8 | V | 2 |
| Receiver | | | | | | |
| Single-ended Input Voltage Tolerance | Vcc | -0.3 | | 4.0 | V | |
| Differential Output Voltage Swing | V _{out,pp} | 300 | | 900 | mVpp | |
| Differential Output Impedance | Z _{out} | 90 | 100 | 110 | Ohm | 3 |
| Data output rise/fall time | Tr/Tf | 9.5 | | | ps | 4 |
| LOS Assert Voltage | V _{losH} | V _{cc} -1.3 | | V _{cc} | V | 5 |
| LOS De-assert Voltage | V _{losL} | V _{ee} | | V _{ee} +0.8 | V | 5 |

Notes:

1. Connected directly to TX data input pins. AC coupled thereafter.
2. Or open circuit.
3. Input 100 ohms differential termination.
4. These are unfiltered 20-80% values.
5. Loss of Signal is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.

Optical Characteristics

Table 4- Optical Characteristics

The following optical characteristics are defined over the Recommended Operating Environment unless otherwise specified.

| Parameter | Symbol | Min. | Typical | Max | Unit | Notes |
|-------------------------------------|----------------------------|------|---------|-------|------|---------|
| Transmitter | | | | | | |
| Center Wavelength | λ_C | 1260 | 1270 | 1280 | nm | FL6843x |
| Optical Spectral Width | $\Delta\lambda$ | | | 1 | nm | |
| Average Optical Power | PAVG | -3 | | 6 | dBm | 1 |
| Side Mode Suppression Ratio | SMSR | 20 | | | dB | |
| Optical Extinction Ratio | ER | 3.5 | | | dB | |
| Transmitter OFF Output Power | Poff | | | -30 | dBm | |
| Transmitter and Dispersion Penalty | TDP | | | 2.7 | dB | |
| Optical Return Loss Tolerance | ORLT | | | 20 | dB | |
| Transmitter Eye Mask | Compliant with IEEE802.3ae | | | | | |
| Receiver | | | | | | |
| Center Wavelength | λ_C | 1320 | 1330 | 1340 | nm | FL8643x |
| Receiver Sensitivity (OMA) | Sen. | | | -14 | dBm | 2 |
| Stressed Receiver Sensitivity (OMA) | | | | -11.5 | dBm | 2 |
| Average Receive Power | | -18 | | -4 | dBm | |
| Input Saturation Power (overload) | Psat | -8 | | | dBm | |
| LOS Assert | LOSA | -30 | | | dBm | |
| LOS De-assert | LOSD | | | -21 | dBm | |
| Damage Threshold | THd | -3 | | | dBm | |
| LOS Hysteresis | LOSH | 0.5 | | | dB | |

Notes:

1. Class 1 Laser Safety per FDA/CDRH and IEC-825-1 regulations.
2. Measured with Light source 1310nm, ER=3.5dB; BER =10^{-12} @ PRBS=2³¹-1 NRZ.

Digital Diagnostic Functions

Table 5- Digital Diagnostic Functions

The following digital diagnostic characteristics are defined over the Recommended Operating Environment unless otherwise specified. It is compliant to SFF-8472 Rev10.2 with internal calibration mode. For external calibration mode please contact our sales staff.

| Parameter | Symbol | Min. | Max | Unit | Notes |
|---------------------------------------|----------|-------|------|------|----------------------|
| Temperature monitor absolute error | DMI_Temp | -3 | 3 | degC | Over operating temp |
| Supply voltage monitor absolute error | DMI_VCC | -0.15 | 0.15 | V | Full operating range |
| RX power monitor absolute error | DMI_RX | -3 | 3 | dB | |
| Bias current monitor | DMI_bias | -10% | 10% | mA | |
| TX power monitor absolute error | DMI_TX | -3 | 3 | dB | |

Pin Assignment

Pin Diagram

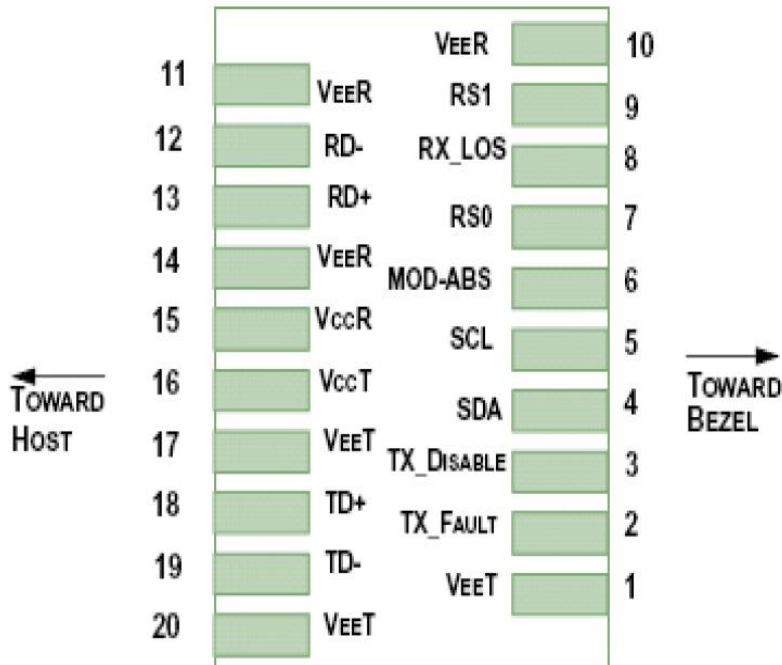


Figure1. Diagram of host board connector block pin numbers and names

Pin Descriptions


Table 6- Pin Descriptions

| PIN | Name | Name/Description | Notes |
|-----|------------|--|-------|
| 1 | VeeT | Transmitter Ground | 1 |
| 2 | TX_Fault | Transmitter Fault | |
| 3 | TX_Disable | Transmitter Disable; Turns off transmitter laser output | |
| 4 | SDA | Two wire serial interface Data Line (LVCMOS-I/O) (MOD-DEF2) | 2 |
| 5 | SCL | Two wire serial interface Clock Line (LVCMOS-I/O) (MOD-DEF1) | 2 |
| 6 | MOD_ABS | Module Definition, Grounded in the module | |
| 7 | RS0 | Rx Rate Select: | |
| 8 | RX_LOS | Receiver Loss of Signal Indication Active LOW | |
| 9 | RS1 | Transmitter Rate Select (not used) | |
| 10 | VeeR | Receiver Ground | 1 |
| 11 | VeeR | Receiver Ground | 1 |
| 12 | RD- | Receiver Inverted Data Output | |
| 13 | RD+ | Receiver Data Output | |
| 14 | VeeR | Receiver Ground | 1 |
| 15 | VccR | Receiver Power - +3.3V | |
| 16 | VccT | Transmitter Power - +3.3 V | |
| 17 | VeeT | Transmitter Ground | 1 |
| 18 | TD+ | Transmitter Non-Inverted Data Input | |
| 19 | TD- | Transmitter Inverted Data Input | |
| 20 | VeeT | Transmitter Ground | 1 |

Notes:

1. Module ground pins GND are isolated from the module case.
2. Shall be pulled up with 4.7K-10Kohms to a voltage between 3.15V and 3.47V on the host board.

Mechanical Dimensions

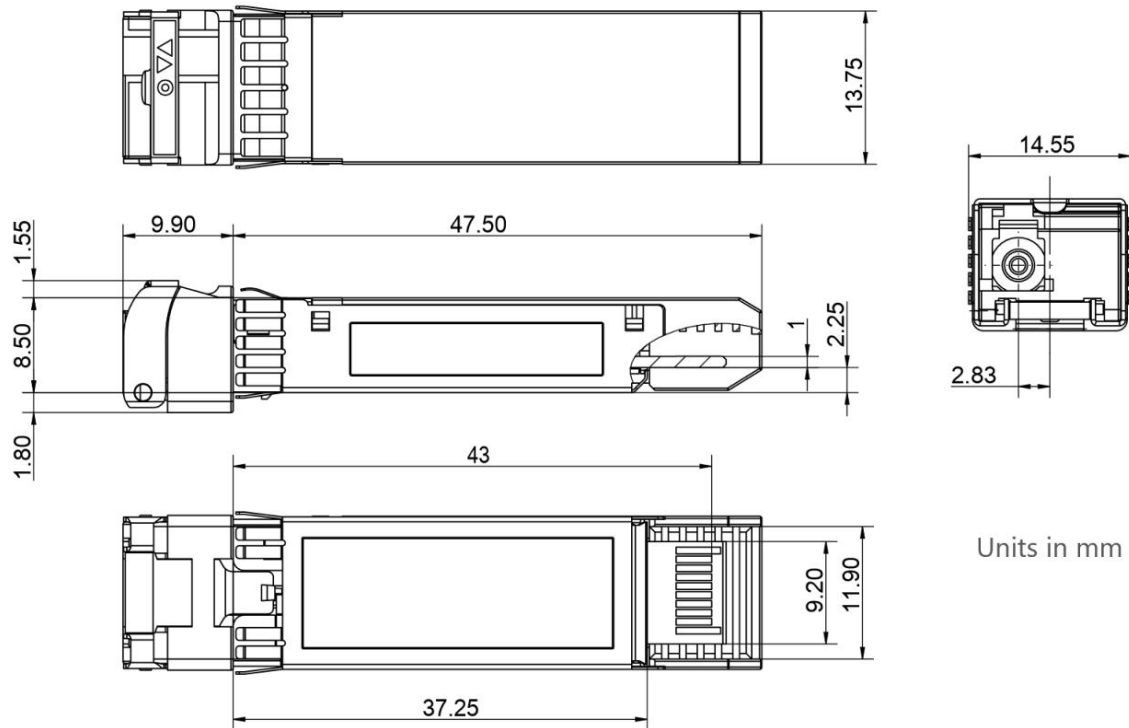

Units in mm

Figure2. Mechanical Outline

Ordering information

Table 7- Ordering information

| Part Number | Data Rate (Gb/s) | Wavelength (nm) | Transmission Distance(km) | Temperature (oC) (Operating Case) |
|-----------------|------------------|-----------------|---------------------------|-----------------------------------|
| SFP-25BL23-40CC | 25.78 | 1270Tx/1330Rx | 40km SMF | 0~70 commercial |
| SFP-25BL23-40CE | 25.78 | 1270Tx/1330Rx | 40km SMF | -10~80 Extended |
| SFP-25BL23-40CI | 25.78 | 1270Tx/1330Rx | 40km SMF | -40~85 Industrial |

AscentOptics reserves the right to make changes to the product(s) or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information. Edition: Apr. 2019 Published by Ascent Optics Co.,Ltd. Copyright © Ascent Optics All Rights Reserved.

E-mail: sales@ascentoptics.com

Web : <http://www.ascentoptics.com>