

10PT-XXTXR-P4C-O

10GEPON Symmetric OLT PR40 XFP Transceiver

Features

- Single fiber bi-directional data links TX 10.3125Gbps, Burst Mode RX10.3125Gbps application
- 0 to 70°C operating case temperature
- 3.3V,5V power supply
- XFP package with SC Receptacle connector
- Hot-pluggable capability
- High power 1577nm EML LD.
- High sensitivity 1270nm APD Support 30km transmission distance with SMF
- RX_LOS indication
- Low EMI and excellent ESD protection
- Digital diagnostic monitor interface
- RoHS6 compliance



Applications

- Symmetric 10GEPON OLT

Standards

- Complies with INF-8077i
- Complies with IEEE 802.3bk
- Complies with FCC 47 CFR Part 15, Class B
- Complies with FDA 21 CFR 1040.10 and 1040.11

Absolute Maximum Ratings

Table 1 - Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit	Notes
Storage Ambient Temperature	TSTG	-40	85	°C	
Operating Case Temperature	Tc	0	70	°C	
Operating Humidity	OH	5	95	%	
VCC3 Power Supply Voltage	VCC3	-0.5	3.6	V	
VCC5 Power Supply Voltage	VCC5	-0.5	5.5	V	

Recommended Operating Environment

Table 2 - Recommended Operating Environment

Parameter	Symbol	Min	Typical	Max	Unit	Notes
Operating Case Temperature	Tc	0		+70	°C	
VCC3 Power Supply Voltage	VCC3	3.13	3.3	3.47	V	
VCC5 Power Supply Voltage	VCC5	4.75	5	5.25	V	
VCC3 Power Supply Current	ICC3		-	800	mA	
VCC5 Power Supply Current	ICC5		-	300	mA	
Date Rate			10.3125		Gbps	
Date Rate Drift		-100		+100	PPM	

Transmitter Optical Characteristics

Table 3-10GEPON Transmitter Optical Characteristics


Parameter	Symbol	Min	Typical	Max	Unit	Notes
Optical Center Wavelength	λ_C	1575		1580	nm	

Optical Spectrum Width (-20dB)	$\Delta\lambda$	-	-	1	nm	
Side Mode Suppression Ratio	SMSR	30			dB	
Average Launch Optical Power	AOP	+4		+8	dBm	Launched into SMF
Power-OFF Transmitter Optical Power				-39	dBm	Launched into SMF
Extinction Ratio	ER	6			dB	PRBS2 ³ 1-1 @10.312 5Gbps
Total Jitter	TJ			0.39	UI	PRBS2 ³¹ -1 @10.312 5Gbps
RIN15OMA				-128	dB/Hz	
Transmitter Reflectance				-10	dB	
Transmitter and Dispersion Penalty	TDP			2	dB	Transmit on 30km SMF
Optical Waveform Diagram	Compliant with IEEE Std 802.3av					Figure 1, Mask Margin > 5 %

Transmitter Electrical Characteristics

Table 4-10GEPON Transmitter Electrical Characteristics

Parameter	Symbol	Min	Typical	Max	Unit	Notes
Data Input Differential Swing		120		850	mV	CML input, AC coupled
Input Differential Impedance		90	100	110	Ω	
Transmitter Enable Voltage - Low		0		0.8	V	
Transmitter Disable Voltage - High		2.0		VCC	V	

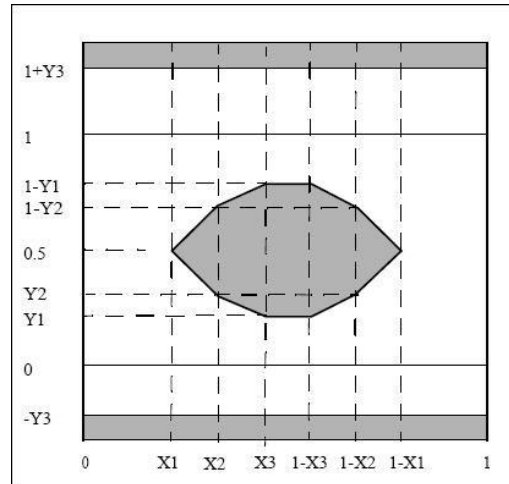

Transmitter Eye Mask Definitions and Test Procedure

X1	X2	X3	Y1	Y2	Y3	UNIT
0.25	0.40	0.45	0.25	0.28	0.40	UI

Receiver Optical Characteristics

Table 5- Receiver Optical Characteristics


Parameter	Symbol	Min	Typical	Max	Unit	Notes
Operating Wavelength		1260		1280	nm	
Sensitivity	SEN			-29	dBm	PRBS2 ³¹ -1@10.3125Gb ps BER $\leq 1 \times 10^{-3}$
Saturation Optical Power	SAT	-9			dBm	PRBS2 ³¹ -1@10.3125Gb ps BER $\leq 1 \times 10^{-3}$
Damage Threshold		-8			dBm	
LOS De-assert Level				-30	dBm	
LOS Assert Level		-45			dBm	
LOS Hysteresis		0.5		6	dB	
Receiver Reflectance				-12	dB	

Receiver Electrical Characteristics

Table 6- Receiver Electrical Characteristics

Parameter	Symbol	Min	Typical	Max	Unit	Notes
Receiver Threshold Settling Time	$T_{SETTLING}$			800	ns	
Data Output Differential Swing		400		850	mV	CML output, AC coupled
LOS Assert Time				2048	ns	
LOS De-assert Time				512	ns	

Timing Parameter Definitions in Burst More Sequence

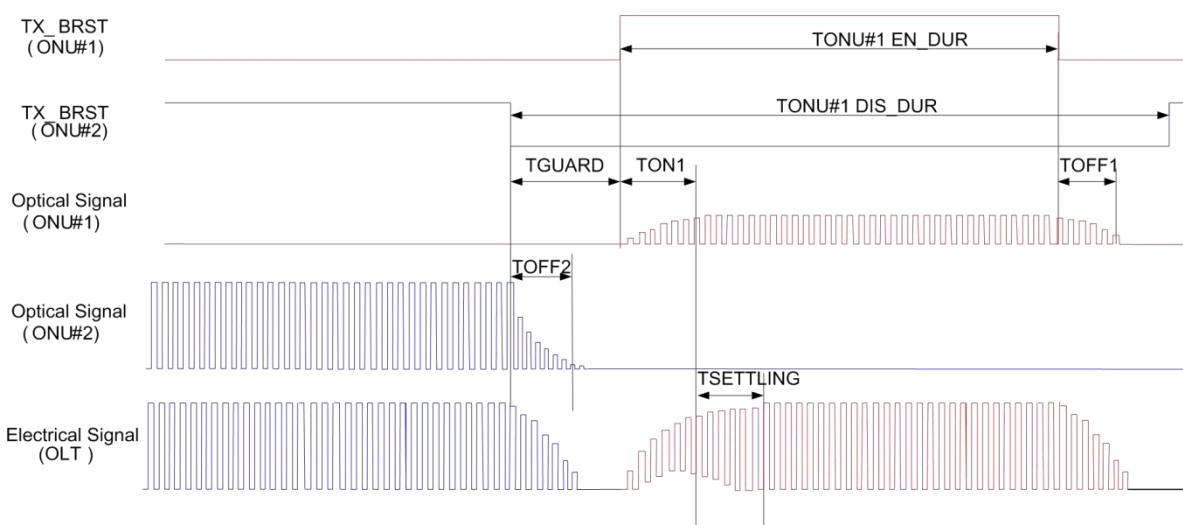

RSSI Timing Sequence

Table 7- RSSI Timing Sequence

Parameter	Symbol	Min	Typ	Max	Unit	Notes
Optical Signal During Time	T_{opt}	1500			ns	
RSSI Trigger width	TW	584	600	616	ns	
RSSI Trigger Delay	TD	250	300	350	ns	
I2C Access Prohibited Time				500	μ s	

Digital RSSI Sample/Hold Timing Specification

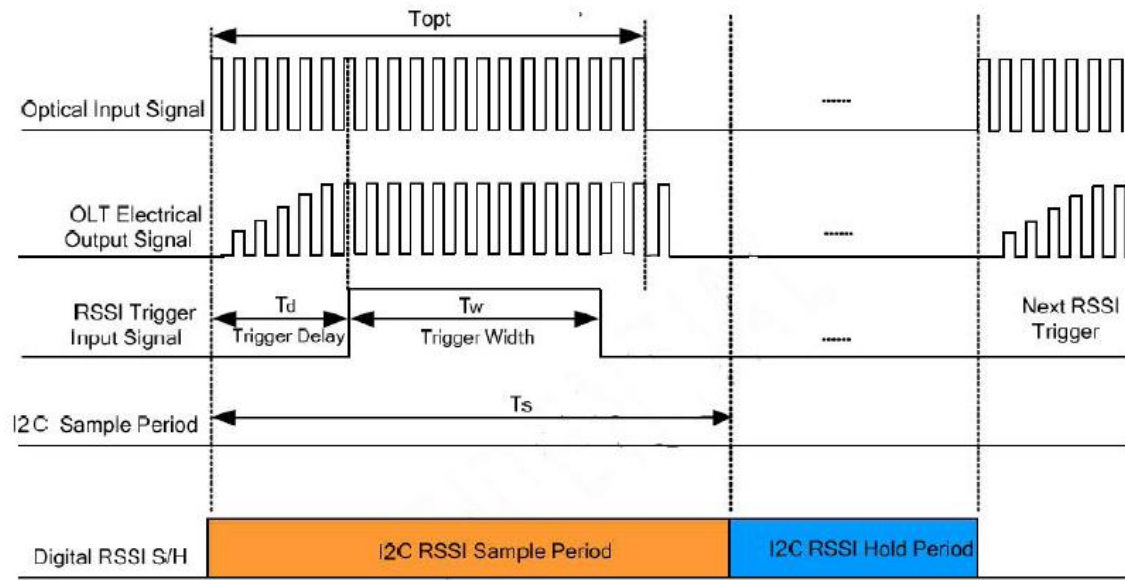


Figure 2 Timing Parameter Definitions in RSSI Trigger

Pin Assignment

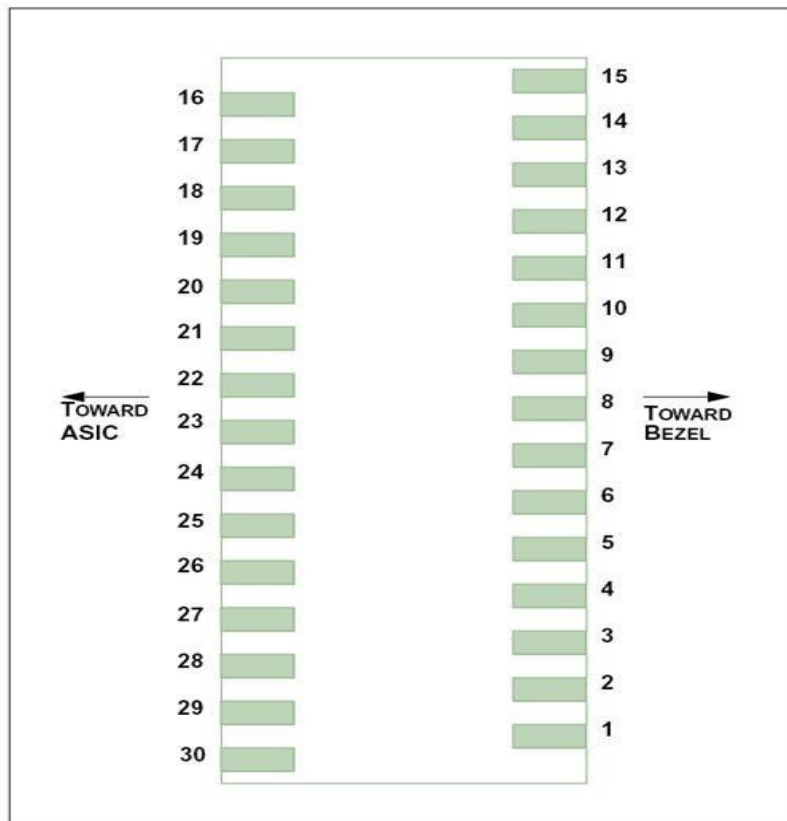


Figure 3 Pin Out Drawing


Pin Descriptions

Table 8-Pin Descriptions


Pin	Name	Description	Notes
1	GND	Module Ground	
2	NC	NC	NC
3	NC	NC	NC
4	GND	Module Ground	
5	TX_DIS	Transmitter Disable	LVTTL Input, Low: transmitter on
6	VCC5	+5V Power Supply	
7	GND	Module Ground	
8	VCC3_TX	Transmitter 3.3V Power Supply	
9	VCC3_RX	Receiver 3.3V Power Supply	
10	SCL	The clock line	The clock line of two wire serial interface
11	SDA	The data line	The data line of two wire serial interface
12	MOD_ABS	Indicates Module is not present.	Grounded in the Module
13	NC	Not connect	
14	Rx_LOS	Rx_LOS Indication	LVTTL output, active High when the receiver lost signal
15	GND	Module Ground	
16	GND	Module Ground	
17	RD_10G_N	Inverted 10G Received Data Out	CML Output, AC coupled
18	RD_10G_P	Non-inverted 10G Received Data Out	CML Output, AC coupled
19	GND	Module Ground	
20	NC	NC	NC
21	NC	NC	NC
22	NC	Not connect	
23	RSSI_TRIG	RSSI Trigger for Transceiver	RSSI Trigger

24	NC	Not connect	
25	NC	Not connect	
26	NC	Not connect	
27	GND	Module Ground	
28	TX_10G_N	Inverted Transmit Data in	CML input, AC coupled
29	TX_10G_P	Non-Inverted Transmit Data in	CML input, AC coupled
30	GND	Module Ground	

Package Outline

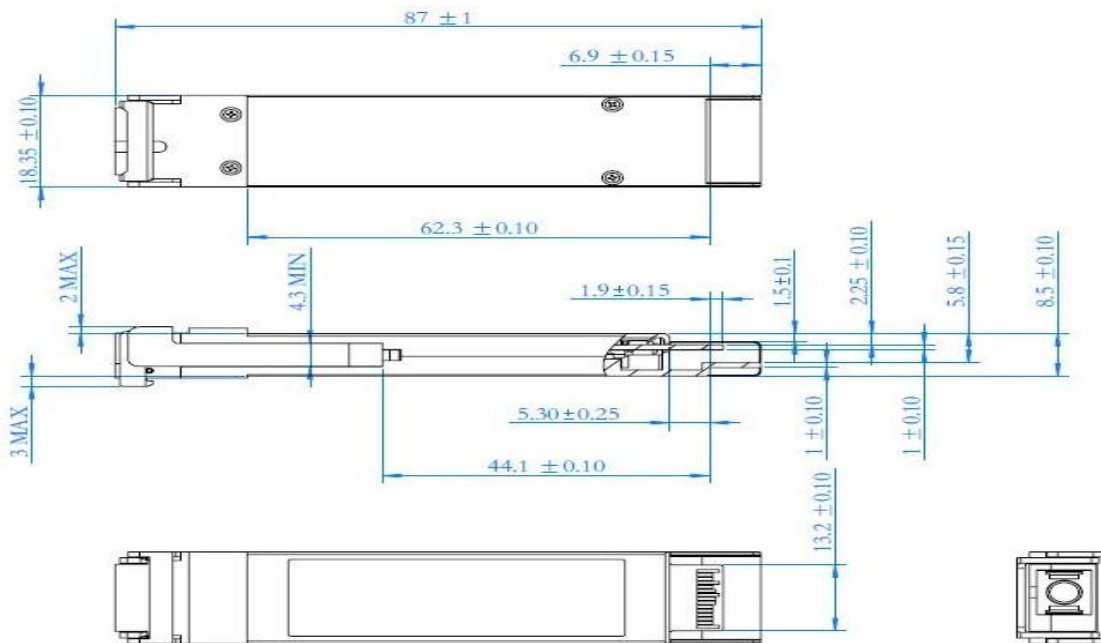

EEPROM Information

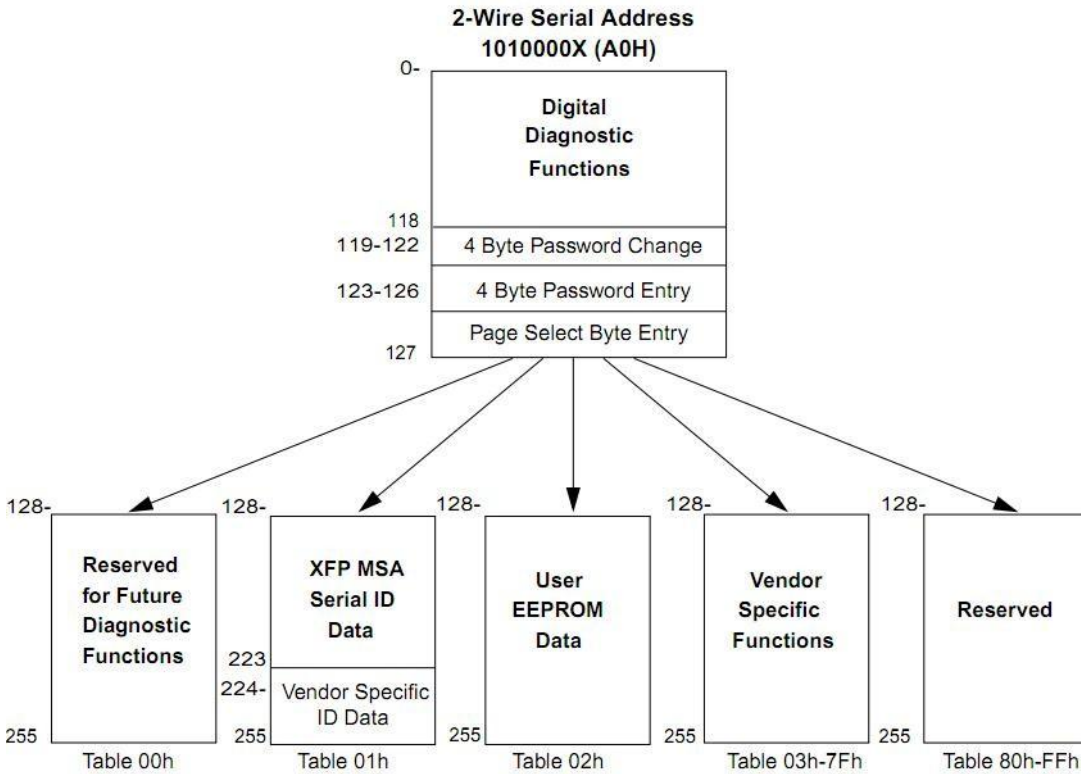

Digital Diagnostic Monitoring

Table 9- Digital Diagnostic Monitoring

Parameter	Range	Accuracy	Calibration	Notes
Temperature	0 to 70°C	±3°C	Internal	LSB: 1/256C
Voltage	2.97 to 3.63V	±10%	Internal	LSB: 0.1mV
Bias Current_10G	0 to 130mA	±10%	Internal	LSB:2uA
TX Power_10G	3to 9dBm	±3dB	Internal	LSB:0.1uW
RX Power monitor	-30 to -8dBm	±3dB	Internal	LSB:0.1uW

Ordering information

Table 10- Ordering information

Part Number	Product Description
10PT-XXTXR-P4C-O	Symmetric 10GE PON OLT XFP without 1G, SC, PR40, 0 ~ +70°C, with DDM

AscentOptics reserves the right to make changes to the product(s) or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information. Edition: Apr. 2019 Published by Ascent Optics Co.,Ltd. Copyright © Ascent Optics All Rights Reserved.

E-mail: sales@ascentoptics.com

Web : <http://www.ascentoptics.com>